

# 銅線用裸圧着スリーブ 直線突合せ用スリーブ 〈B形〉


JIS JG0608004

UL E74917

SF 66230



RoHS 指令対応品

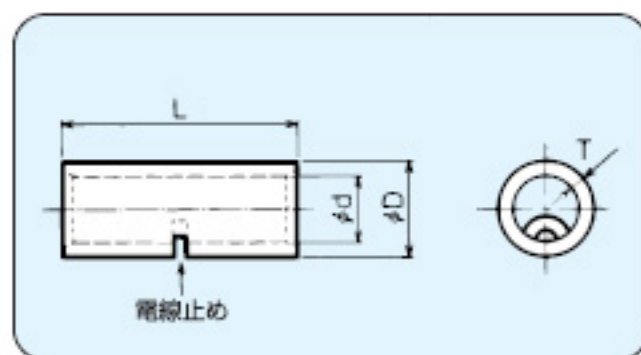

圧着スリーブ

規格	呼び	各部の寸法				適合電線範囲		適合工具	一箱入数	
		L	φd	φD	T	撚線mm <sup>2</sup>	AWG			
	Ⓛ	B-0.5	12.0	1.3	2.3	0.5	0.2~0.5	24-20	*DS031, *DH-1B, *DS-A5	1,000 (100×10)
Ⓛ	Ⓛ	B-1.25		1.7	3.3	0.75	0.25~1.65	22-16	*DS031, *DS-H12, *DS-H18, *DH-1B, *DS-A5	
Ⓛ	Ⓛ	B-2	15.0	2.3	4.1	0.8	1.04~2.63	16-14	*DS-H12, *DS-H18, *DS-H214, *DH-1B, *DS-A5, *DS-E14	500(100×5)
Ⓛ	Ⓛ	B-5.5		3.4	5.4	1.0	2.63~6.64	12-10	*DS-H18, *DS-H214, *DH-1B, *DS-A5, *DS-E14	
Ⓛ	Ⓛ	B-8	21.0	4.5	7.0	1.2	6.64~10.52	8	*DS-H18, *DS-H214, *DS-E14	300(100×3)
Ⓛ	Ⓛ	B-14	26.0	5.8	8.9	1.5	10.52~16.78	6	*DS-H214, *DS-H060, *DS-H0150, *DS-E14, *DS-E60, *DS-E150, (注1)	200(100×2)
Ⓛ	Ⓛ	B-22	29.0	7.7	11.3	1.8	16.78~26.66	4	*DS-H060, *DS-H0150, *DS-E60	
Ⓛ	Ⓛ	B-38	32.0	9.4	13.2		26.66~42.42	2	*DS-E150, (注1)	50
Ⓛ	Ⓛ	B-60	36.0	11.4	15.3	2.0	42.42~60.57	1/0	*DS-H060, *DS-H0150, 12号H, *12号A, *DS-E60, *DS-E150, (注1)	
	Ⓛ	B-70	37.0	13.3	17.5		60.57~76.28	2/0	*DS-H0150, *DS-E150, (注1)	25
	Ⓛ	B-80	38.0	14.5	19.5	2.3	76.28~96.3	3/0	*DS-H0150, 12号H, *12号A, *DS-E150, (注1)	
Ⓛ	Ⓛ	B-100		16.4	22.1	2.6	96.3~117.2	4/0		
Ⓛ	Ⓛ	B-150	54.0	19.5	26.4	3.2	117.2~152.05	250-300MCM	12号H, *12号A, (注1)	10
	Ⓛ	B-180	57.0	21.0	28.5	3.5	152.05~192.6	300-350MCM		8
Ⓛ	Ⓛ	B-200	63.0	24.0	32.4	4.0	192.6~242.27	400MCM	12号H, *12号A	5
Ⓛ	Ⓛ	B-325	72.0	28.0	37.0	4.5	242.27~325	500-600MCM		4

1. \*印はUL適合工具です。  
2. (注1) \*DS-E200M, \*DS-E250M