


銅線用裸圧着端子 丸形端子 (R形)

JIS JQ0608003

UL E74917

SP 66230

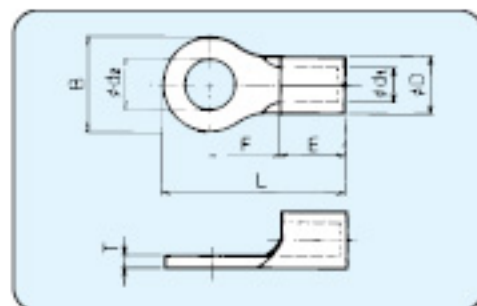

RoHS指令対応品

規格	印	呼び	各部の寸法							適合電線範囲			適合工具	一箱入数										
			φd ₁	B	L	F	E	φD	φd ₂	T	単線mm	撚線mm			AWG									
		● R 5.5-V3	3.2	7.2	15.8	5.9	6.3	5.6	3.4	1.0	}	}	12-10	*DS-H18 *DS-H214 *DH-1B *DS-A5 *DS-E14	500 (100×5)									
		● R 5.5-M3		7.1	18.3	8.5																		
		● R 5.5-V3.5	3.7	7.2	15.8	5.9																		
		● R 5.5-3.5		7.7	17.3	7.2																		
		● R 5.5-M3.5	4.3	7.1	18.3	8.5																		
		● R 5.5-V4		7.2	15.8	5.9																		
		● R 5.5-S4	5.3	7.7	17.3	7.2																		
		● R 5.5-M4		7.1	18.3	8.5																		
		● R 5.5-4	6.4	9.5	19.5	8.5																		
		● R 5.5-S5		8.0	18.8	8.5																		
		● R 5.5-5	5.3	9.5	19.5	8.5																		
		● R 5.5-L5		12.0	22.5	10.2																		
		● R 5.5-S6	6.4	9.5	19.5	8.5																		
		● R 5.5-6		12.0	22.5	10.2																		
		● R 5.5-L6	8.4	15.0	26.3	14.0																		
		● R 5.5-A6			29.8	16.0																		
		● R 5.5-8	10.5	27.3	14.0	8.3	7.1	4.5	1.2	}	}	8	*DS-H18 *DS-H214 *DS-E14	400 (100×4)										
		● R 5.5-10	13.0												20.0	32.0	15.7							
		● R 5.5-12	15.0	32.0	48.0										25.7									
		● R 5.5-14	17.0													21.8	8.5							
		● R 5.5-16	5.3	9.0	22.1										9.3									
		● R 8-S4			21.3										8.5									
		● R 8-4	6.4	10.0	21.8										8.5									
		● R 8-V5			22.1										9.3									
		● R 8-V5L	5.3	9.0	26.6										13.8									
		● R 8-SS5			21.3										8.5									
		● R 8-S5	8.4	15.0	21.8	8.5																		
		● R 8-5			12.0	23.5	9.2																	
		● R 8-S6	10.5	29.5	14.0	10.0	9.0	5.8	1.5	}	}	6	*DS-H214 *DS-H060 *DS-H0150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M	200 (100×2)										
		● R 8-6													10.0	21.8	8.5							
		● R 8-A6	6.4	12.0	23.5										9.2									
		● R 8-8			31.8										16.0									
		● R 8-10	8.4	15.0	29.5										14.0									
		● R 8-12			13.0										20.0	34.0	15.7							
		● R 8-14	10.5	29.5	14.0										10.0	9.0	5.8	1.6	}	}	6	*DS-H214 *DS-H060 *DS-H0150 *DS-E14 *DS-E60 *DS-E150 *DS-E200M *DS-E250M	100	
		● R 8-16																						17.0
		● R 8-20	5.3	10.0	28.5																			13.5
		● R 14-S4			9.0																			28.0
		● R 14-SS5	6.4	12.0	29.5	13.5																		
		● R 14-S5			10.0	28.5																		
		● R 14-5	8.4	16.0	32.5	15.0																		
		● R 14-S6			12.0	29.5																		
		● R 14-6	10.5	22.0	40.6	19.6																		
		● R 14-S8					16.0	32.5	15.0															
		● R 14-8	13.0	22.0	40.6	19.6																		
		● R 14-10					17.0	30.0	49.0	24.0														
		● R 14-12	15.0	30.0	49.0	24.0																		
		● R 14-14					17.0	30.0	49.0	24.0														
		● R 14-16	21.0	21.0	21.0	21.0																		
		● R 14-20					21.0	21.0	21.0	21.0														

1. 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
2. CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
3. 上記寸法表にかかわらず特注品もご相談ください。
4. *印はUL適合工具です。
5. ●印は曲げ加工可能製品です。ただし、一部の製品については角度の制限がありますので、ご相談ください。