


銅線用裸圧着端子 丸形端子 (R形)

JIS JQ0608003

UL E74917

SP 66230

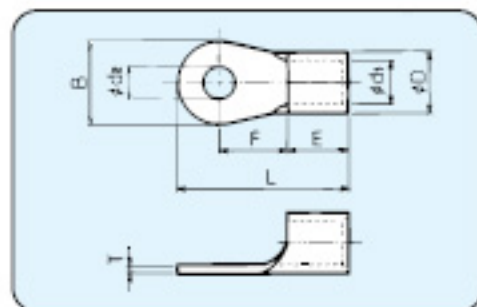

RoHS指令対応品

規格	印	呼び	各部の寸法									適合電線範囲			適合工具	一箱入数
			φd ₁	B	L	F	E	φD	φd ₂	T	単線mm	撚線mm	MCM			
	●	R 200-S 10	10.5	44.0	71.0	21.5	32.5	32.7	24.0	4.0	5	5	400	12号H *12号A *DS-E200M *DS-E250M	8	
	●	R 200-S 12	13.0													
	●	R 200-S 14	15.0													
	●	R 200-S 16	17.0													
	●	R 200-10	10.5													
		R 200-12	13.0		80.0	25.5										
		R 200-14	15.0													
		R 200-16	17.0													
	●	R 200-L 10	10.5													
	●	R 200-L 12	13.0													
	●	R 200-L 14	15.0	91.5	37.0											
	●	R 200-L 16	17.0													
		R 200-18	19.0													
		R 200-20	21.0													
		R 200-24	25.0													
		R 200-27	28.0													
	●	R 250-12	13.0			44.0	80.0	25.5	32.5	35.6	26.0	4.5	-	250	-	12号H 12号A
	●	R 250-14	15.0													
	●	R 250-16	17.0													
	●	R 325-10	10.5	50.5	92.0	30.3	36.5	37.6	28.0	4.5	17.5	242.27	500-600	12号H *12号A	6	
	●	R 325-12	13.0													
	●	R 325-14	15.0													
	●	R 325-16	17.0													
	●	R 325-L 10	10.5													
	●	R 325-L 12	13.0		105.0	43.3										
	●	R 325-L 14	15.0													
	●	R 325-L 16	17.0													
		R 325-18	19.0													
		R 325-20	21.0													
		R 325-24	25.0													
		R 325-27	28.0													

- 各呼びの印は、JIS規格品、UL登録品、CSA登録品です。
- CSA登録品としてご使用の際は、注文時にご指示ください。カートンがCSA品用となります。
- 上記寸法表にかがらず特注品もご相談ください。
- *印はUL適合工具です。
- 印は曲げ加工可能製品です。ただし、一部の製品については角度の制限がありますので、ご相談ください。